

## DESCRIPTION


Power Amplifier Module (VX-1250DA/VX-1500DA) is class D power amplifier, high efficiency and energy saving. It is modular design, small and light appearance. It has a fault detection function, which can detect faults such as overcurrent, overheat, and fan abnormality, and displays them on the LED light of the Peering Frame (VX-1000PF).

There are two ower amplifiers (500W and 250W).

## SPECIFICATIONS

Model	VX-1250DA	VX-1500DA
Power Supply	AC220V-240V, 50Hz/60Hz (Supply from VX-1000PF)	
Amplifier	Class D digital amplifier	
Power Consumption	27.7W (Standby mode) 255W (Rated output status)	28.2W (Standby mode) 505W (Rated output status)
Rated Output	250W	500W
Frequency Response	20 ~ 20,000Hz $\pm$ 3dB	
Distortion	< 1%	
S/N	> 90dB	
Cooling Method	Forced air cooling	
Operating Temperature	-10°C ~ +55°C	
Operating Humidity	$\leq$ 90% no condensation	
Finish	SECC	
Dimensions	82.5 (W) $\times$ 128.7 (H) $\times$ 316 (D)mm	
Weight	2.035Kg	2.085Kg
Accessories	Terminals (hole) (2EDGKM-5.08-2P) :1pcs	

## APPEARANCE

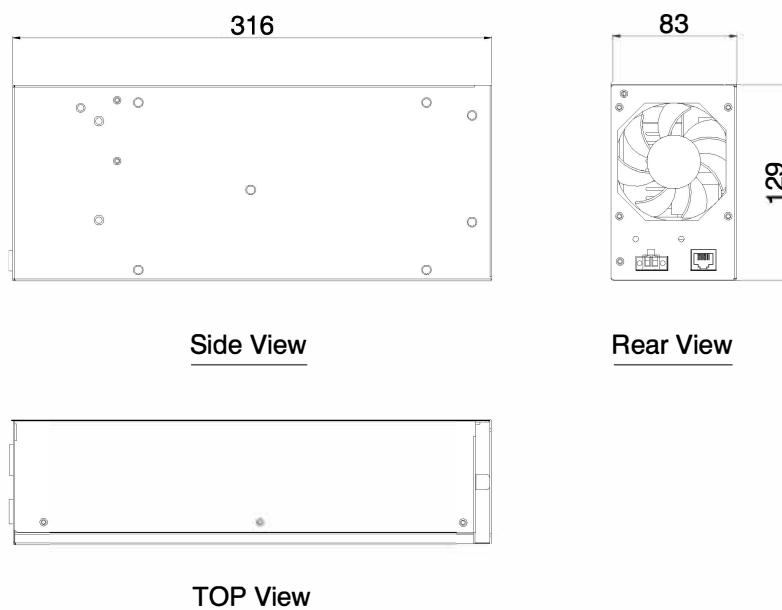

UNIT: mm SCALE: 1/5